

Vitte Agile

Wine-by-the-glass dispenser for **3 bottles** with a **touch screen**: customers see each wine with its pour sizes and tasting notes and pour on their own. Wines and prices are managed from the web panel.

3 750 ml bottles	2 temperature zones	10.1" touch screen	20+ days open wine preserved
----------------------------	-------------------------------	------------------------------	--




WHAT IT DOES

Touch screen Each wine shown with its pour sizes, prices and tasting notes. Customers choose and pour on their own.	Wines and prices from the web Add a wine from a photo of its label (AI), set the 3 pour sizes and prices are calculated for you.	On-screen indicators Level of each bottle, connection status and temperatures at a glance.
2 temperatures Cold zone for bottle 1 and a warmer zone for bottles 2 and 3, separated by an acrylic divider.	Bottle Lock preservation Pressurized system with argon or nitrogen (Vitte patent): an open bottle lasts over 20 days without oxidizing.	Per-position calibration Each spout is adjusted separately so every pour is accurate.

SPECIFICATIONS

CAPACITY AND SERVICE		COOLING	
Bottles	3 × 750 ml (1 module)	Temperature zones	2 (bottle 1 / bottles 2 and 3, with divider)
Pour sizes	3 configurable: tasting, half glass and glass	Range	5 °C to 19 °C (41 °F to 66 °F)
Preservation	Argon or nitrogen, over 20 days	Time to serve	Bottle at room temperature: about 2 h to reach its temperature (to pour right away, load it chilled)
Pressurization	Bottle Lock (Vitte patent)	Refrigeration	1/6 HP compressor per module, R134A refrigerant, max. low-side pressure 3 PSI
Display	10.1" touch tablet	Insulation	Double chamber with UV protection
Languages	Spanish, Portuguese and English	Lighting	Interior LED
ELECTRICAL		PHYSICAL	
Power supply	220 V, 50/60 Hz (110 V on request)	Dimensions (W × H × D)	403 × 664 × 450 mm
Power draw	230 W	Weight	28 kg (32 kg packed)
		Color	Black with stainless steel details
		Packaging	Export MDF crate, 480 × 760 × 550 mm
		Origin	Argentina or Brazil · HS 8476.21

Installation dimensions and ventilation

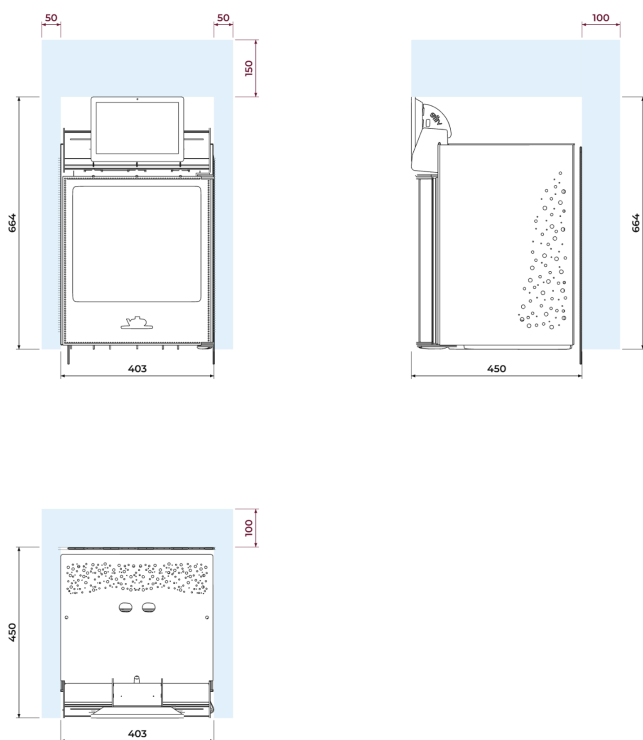

Dimensions in mm. In light blue, the clearance for ventilation.

SPACE REQUIRED

Unit	403 × 664 × 450 mm
Minimum space	503 × 814 × 550 mm
Free behind	10 cm
Free on each side	5 cm
Free above	15 cm
Free in front	37 cm, to open the door

The lower door hinge must rest on the firm surface.

Never leave the unit with the door overhanging the edge of the counter or cabinet: the hinge can bend and the door can come off.

Protect the furniture. The unit is a refrigerator: there may be condensation or water leaks, for example during defrost. If you place it on wood or any material that moisture can damage, take precautions (a tray or a waterproof mat underneath).

INSTALLATION

- Firm, level surface, out of direct sun and heat.
- 220 V grounded outlet.
- Let it rest before plugging in: 4 h (24 h if it traveled lying down).
- Installation video call with technical service.

INCLUDED

- Pressure regulator and hose, according to the region and the terms of sale
- Acrylic divider for the two temperature zones
- 2 «step» accessories for bottles with a tapered neck
- Access to the web management panel
- Installation video call with technical service
- **12-month** warranty against manufacturing defects

Gas cylinder: according to the region and the terms of sale.

Usually an external cylinder bought locally ($\frac{1}{2}$ m³ or larger, depending on local availability; about 175 bottles per $\frac{1}{2}$ m³) or supplied by Vitte; a small internal 800 cm³ cylinder where available. Check with Vitte for your region.

ALL POSSIBLE COMBINATIONS



Whites 3 · Reds 0



Whites 1 · Reds 2



Whites 0 · Reds 3

Guide temperatures: whites 6 to 8 °C (43–46 °F), reds 14 to 16 °C (57–61 °F). Each zone: 5 to 19 °C. The left zone must be the same as or colder than the right one, with a maximum difference of 8 °C.