

Vitte Classic

Wine-by-the-glass dispenser for **3 bottles** with a **display and 3 buttons** and **two temperature zones**. Run it from the front: no tablet, internet or web panel needed.

3

750 ml bottles

2

temperature
zones

3

buttons and
display

20+ days

open wine
preserved


WHAT IT DOES

Display and 3 buttons

Each button pours from its own position.
Works standalone, with no tablet, internet or web panel.

Set pour or free pour

Tasting, half glass or glass with a countdown, or free mode: it pours while you hold the button.

2 temperatures

Cold zone for bottle 1 and a warmer zone for bottles 2 and 3, separated by an acrylic divider.

Per-position calibration

Each spout is adjusted separately so every pour is accurate.

Bottle Lock preservation

Pressurized system with argon or nitrogen (Vitte patent): an open bottle lasts over 20 days without oxidizing.

SPECIFICATIONS

CAPACITY AND SERVICE

Bottles	3 × 750 ml (1 module)
Pour sizes	3 configurable: tasting, half glass and glass
Preservation	Argon or nitrogen, over 20 days
Pressurization	Bottle Lock (Vitte patent)
Display	16 × 2 character LCD display and 3 buttons
Languages	One language, set for the destination country (Spanish or Portuguese)

ELECTRICAL

Power supply	220 V, 50/60 Hz (110 V on request)
Power draw	230 W


COOLING

Temperature zones	2 (bottle 1 / bottles 2 and 3, with divider)
Range	5 °C to 19 °C (41 °F to 66 °F)
Time to serve	Bottle at room temperature: about 2 h to reach its temperature (to pour right away, load it chilled)
Refrigeration	1/6 HP compressor per module, R134A refrigerant, max. low-side pressure 3 PSI
Insulation	Double chamber with UV protection
Lighting	Interior LED

PHYSICAL

Dimensions (W × H × D)	403 × 585 × 450 mm
Weight	28 kg (32 kg packed)
Color	Black with stainless steel details
Packaging	Export MDF crate, 480 × 760 × 550 mm
Origin	Argentina or Brazil · HS 8476.21

Installation dimensions and ventilation

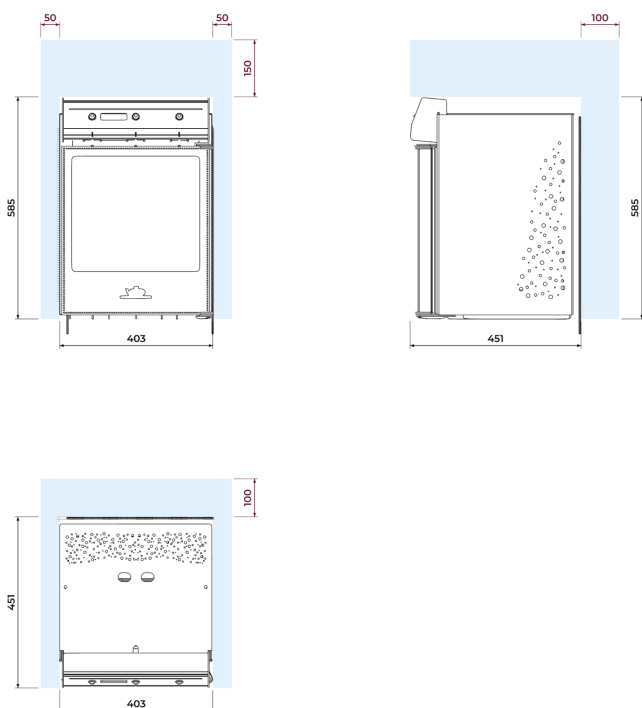

Dimensions in mm. In light blue, the clearance for ventilation.

SPACE REQUIRED

Unit	403 × 585 × 450 mm
Minimum space	503 × 735 × 550 mm
Free behind	10 cm
Free on each side	5 cm
Free above	15 cm
Free in front	37 cm, to open the door

The lower door hinge must rest on the firm surface.

Never leave the unit with the door overhanging the edge of the counter or cabinet: the hinge can bend and the door can come off.

Protect the furniture. The unit is a refrigerator: there may be condensation or water leaks, for example during defrost. If you place it on wood or any material that moisture can damage, take precautions (a tray or a waterproof mat underneath).

INSTALLATION

- Firm, level surface, out of direct sun and heat.
- 220 V grounded outlet.
- Let it rest before plugging in: 4 h (24 h if it traveled lying down).
- Installation video call with technical service.


INCLUDED

- Pressure regulator and hose, according to the region and the terms of sale
- Acrylic divider for the two temperature zones
- 2 «step» accessories for bottles with a tapered neck
- Installation video call with technical service
- **12-month** warranty against manufacturing defects

Gas cylinder: according to the region and the terms of sale.

Usually an external cylinder bought locally ($\frac{1}{2}$ m³ or larger, depending on local availability; about 175 bottles per $\frac{1}{2}$ m³) or supplied by Vitte; a small internal 800 cm³ cylinder where available. Check with Vitte for your region.

ALL POSSIBLE COMBINATIONS



Guide temperatures: whites 6 to 8 °C (43–46 °F), reds 14 to 16 °C (57–61 °F). Each zone: 5 to 19 °C. With the left zone below 13 °C, the right zone runs at least 6 °C warmer.