

Vitte Max 9

9 bottles in 3 modules with a **single touch screen** and **built-in payments**: the complete wine-by-the-glass station for restaurants, bars and wine shops.


9

750 ml bottles

6

temperature
zones

10.1"

touch screen

20+ days

open wine
preserved

WHAT IT DOES

Modular

3-bottle modules joined with a single tablet. If one module needs service, the rest keep working.

Pay per glass **PRO**

Pay with a

Mercado Pago

QR code in Argentina or

PIX

in Brazil, or with the customer's prepaid balance.

Customers with balance **PRO**

Customers sign up by scanning the QR on the screen. They add balance at the till or from their phone and pour with their account.

Order from the phone **PRO**

Customers pick the wine and pour size on their phone and confirm at the machine.

Reports and cash **PRO**

Consumption by customer, wine and machine, plus a cash report. Everything exports to Excel from the web panel.

Wines and prices from the web

Add a wine from a photo of its label (AI), set the 3 pour sizes and prices are calculated for you.

SPECIFICATIONS

CAPACITY AND SERVICE

Bottles	9 × 750 ml (3 modules)
Pour sizes	3 configurable: tasting, half glass and glass
Preservation	Argon or nitrogen, over 20 days
Pressurization	Bottle Lock (Vitte patent)
Display	10.1" touch tablet
Languages	Spanish, Portuguese and English

ELECTRICAL

Power supply	220 V, 50/60 Hz (110 V on request)
Power draw	690 W (230 W per module)


COOLING

Temperature zones	6 (3 modules with 2 zones each, with divider)
Range	5 °C to 19 °C (41 °F to 66 °F)
Time to serve	Bottle at room temperature: about 2 h to reach its temperature (to pour right away, load it chilled)
Refrigeration	1/6 HP compressor per module, R134A refrigerant, max. low-side pressure 3 PSI
Insulation	Double chamber with UV protection
Lighting	Interior LED

PHYSICAL

Dimensions (W × H × D)	1210 × 664 × 450 mm
Weight	84 kg (3 modules of 28 kg)
Color	Black with stainless steel details
Packaging	3 export MDF crates (one per module), 480 × 760 × 550 mm each
Origin	Argentina or Brazil · HS 8476.21

Installation dimensions and ventilation

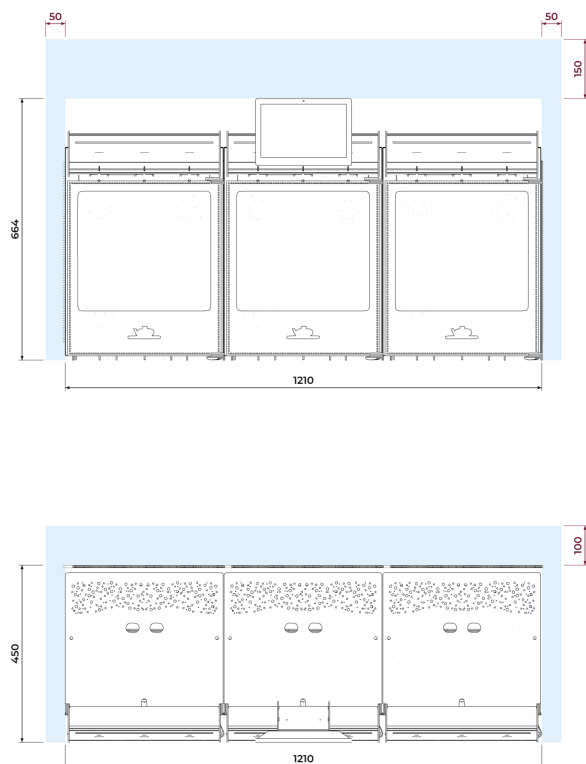

Dimensions in mm. In light blue, the clearance for ventilation.

SPACE REQUIRED

Unit	1210 × 664 × 450 mm
Minimum space	1310 × 814 × 550 mm
Free behind	10 cm
Free on each side	5 cm
Free above	15 cm
Free in front	37 cm, to open the door

The lower door hinge must rest on the firm surface.

Never leave the unit with the door overhanging the edge of the counter or cabinet: the hinge can bend and the door can come off.

Protect the furniture. The unit is a refrigerator: there may be condensation or water leaks, for example during defrost. If you place it on wood or any material that moisture can damage, take precautions (a tray or a waterproof mat underneath).

INSTALLATION

- Firm, level surface, out of direct sun and heat.
- 220 V grounded outlet.
- Let it rest before plugging in: 4 h (24 h if it traveled lying down).
- Installation video call with technical service.

INCLUDED

- Pressure regulator and hose, according to the region and the terms of sale
- 3 acrylic dividers (one per module)
- 2 «step» accessories for bottles with a tapered neck
- Access to the web management panel
- Installation video call with technical service
- **12-month** warranty against manufacturing defects

Gas cylinder: according to the region and the terms of sale.

Usually an external cylinder bought locally ($\frac{1}{2}$ m³ or larger, depending on local availability; about 175 bottles per $\frac{1}{2}$ m³) or supplied by Vitte; a small internal 800 cm³ cylinder where available. Check with Vitte for your region.

ALL POSSIBLE COMBINATIONS

Whites 9 · Reds 0	Whites 7 · Reds 2	Whites 6 · Reds 3	Whites 5 · Reds 4	Whites 4 · Reds 5
Whites 3 · Reds 6	Whites 3 · Reds 6	Whites 2 · Reds 7	Whites 1 · Reds 8	Whites 0 · Reds 9

Guide temperatures: whites 6 to 8 °C (43–46 °F), reds 14 to 16 °C (57–61 °F). Each zone: 5 to 19 °C. The left zone must be the same as or colder than the right one, with a maximum difference of 8 °C.